



HILDEBRAND CABINET WASHER TYPE TROLLEYFLEX S 10 R/D



The **TROLLEYFLEX** cleaning system is designed for the automatic washing, rinsing and drying (byspinning) of big washing items such as trolleys, big boxes/containers, pallets and smaller production wash items (in a carrier trolley).

**EXHIBITION- AND TEST MACHINE
YEAR 2015**

**DELIVERY TIME
3-4 WEEKS**

25% SPECIAL DISCOUNT


Technical Datas:

Water pressure	4 bis 4.5	bar	machine weigth empty in Kg	1500	Kg
Tank filling 1 x per day	300	L/day	boiler weigth empty in Kg	120	Kg
Rinse water (Liter/batch) ca	18-20	LL/batch	boiler weigth filled in Kg	400	Kg
Rinse water (Liter/h.) ca	180	L/h	Standard transport highh min. mm	3'000	mm
steam heated version Kg/h	96	Kg/h	Standard transport width min.mm	2'150	mm
Installed electrical capacity KW	13	KW	special transport highh min. mm	2'600	mm
exhaust air m3/h	3'000	m3/h	Price for 2'600 mm reduced highh	1'250	Euro



STANDARD WASH GOOD TROLLEYS

for Cabinet Cleaning Unit type TROLLEYFLEX

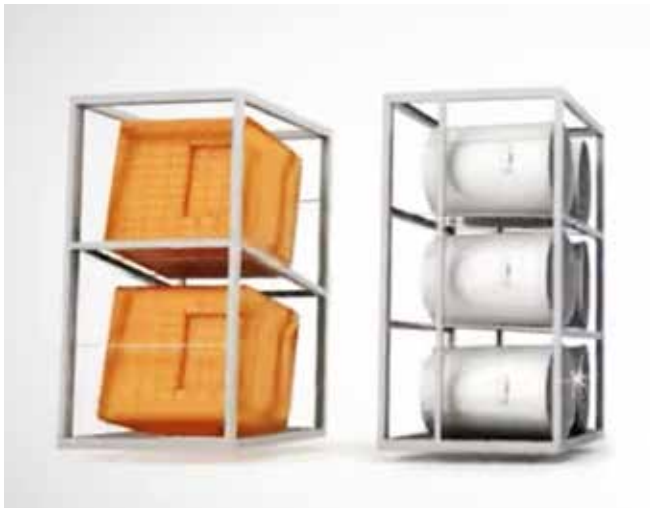

HILDEBRAND offers different trolleys for the customer wash goods according to your specification. This grants the customer washing of different small or bigger parts in the same machine. After receipt of detailed description of wash goods (pictures / dimensions / drawings)

with information about impurity and surface structure the trolleys will be designed for optimized use. This option allows maximum efficiency and flexibility of the washing machine.

EXHIBITION MACHINE BUILT YEAR 2015

Installation drawing No. 70 070e.2.0 steam heated

